

DirectTex®

Artist Mambo®

Field of application

Backlit

Specifications

	564160 137
	100 % polyester weave fabrics PVC-free, recyclable
	ca. 160/ 252/ 320/ 505 cm ca. 63/ 99/ 126/ 199 inch other widths available on request
	B-s1, d0 DIN EN 13501-1 NFPA 701
	ca. 170 g/m ² ca. 5.0 oz/yd ²
	ca. 0.25 mm ca. 250 µm
	rolls 50/ 100 m 55/ 109 yd
	coated side: 7 uncoated side: 6-7 DIN EN ISO 105-B02
	warp: 0.8 % weft: 1.6 % DIN EN 14704-1
	indirect, direct light
	cold, heat, ultrasonic cut
	total footprint: 1,400 kg CO ₂ /m ² determination accuracy: 84%

	warp: 1314.1 N weft: 1238.6 N DIN EN ISO 13934-1
	warp: 27.9 % weft: 32.6 % DIN EN ISO 13934-1

Printing methods

print	UV	Latex	Dyesub
Inside	•		
Outside		•	•

Article shrinkage (50 sec hold up time)

	shrinkage in cross direction	shrinkage in longitudinal direction	recommended fixing temperature
180°C	0,7 %	1,5 %	•
190°C	0,8 %	1,8 %	
200°C	1,2 %	2,7 %	
210°C	1,3 %	2,8 %	

Certifications






DirectTex[®] Artist Mambo[®]

Field of application

Backlit

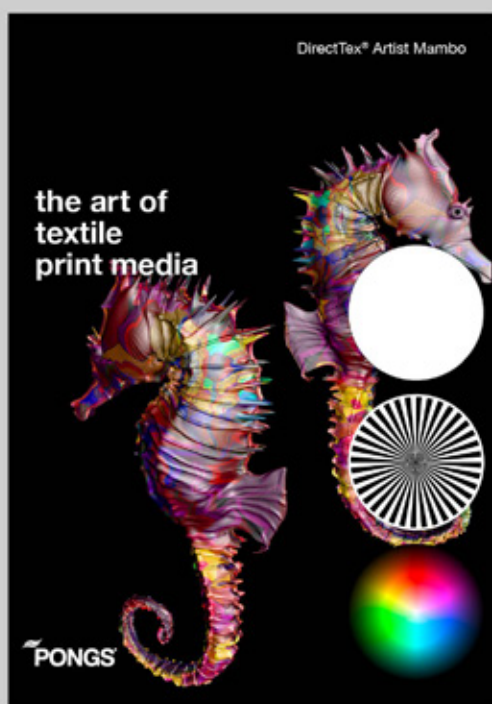

Ref.-Nr.: 564160 137 | Preview print sample



PONGS GROUP GMBH & CO. KG

Bahnhofstraße 21
07919 Pausa-Mühltröff
Germany

Phone +49 36645 350-0
salestt@pongs.de
www.pongs.com

Find the latest version by scanning the QR code.
We reserve the right for technical modifications.
The above mentioned details are non-binding.
A tolerance of $\pm 5\%$ is valid. Effective: 2024/08